


# FOLDERS

## 208J

The 208J friction feed manual paper folder offers easy setup for standard and custom folds with a 3-roller system. Its control panel includes a 4-digit counter, test button, and automatic conveyor for smooth paper ejection.

- A FOLD PLATE GRAPHICS**  
Fold plates with clear graphics and measurements ensure accurate paper stop placement.

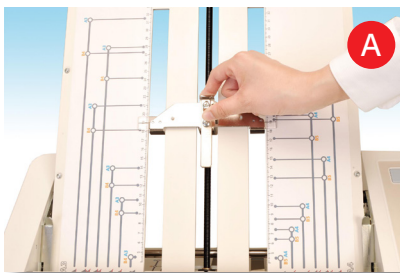

- B EXTENDED EXIT TRAY**  
An extra long exit tray ensures neat stacking of finished jobs.


- C QUICK RELEASE ROLLERS**  
The quick release rollers make regular maintenance and cleaning easy.



# FOLDERS


## 208J

- Easy set-up for standard and custom folds
- The control touch panel includes 4 digit counter with addition and subtraction functions
- Test button folds 2 sheets for inspection
- Extended exit tray for neat stacking of folded sheets
- Automatic conveyor ensures smooth ejection of folded paper
- Single sheet feeding automatically maintained for different weights of paper
- Auxiliary paper guide for cross folding
- Load and unload paper from the same side
- Display alert and audible signal in case of incorrect operation
- Skew and micro-adjustment dials

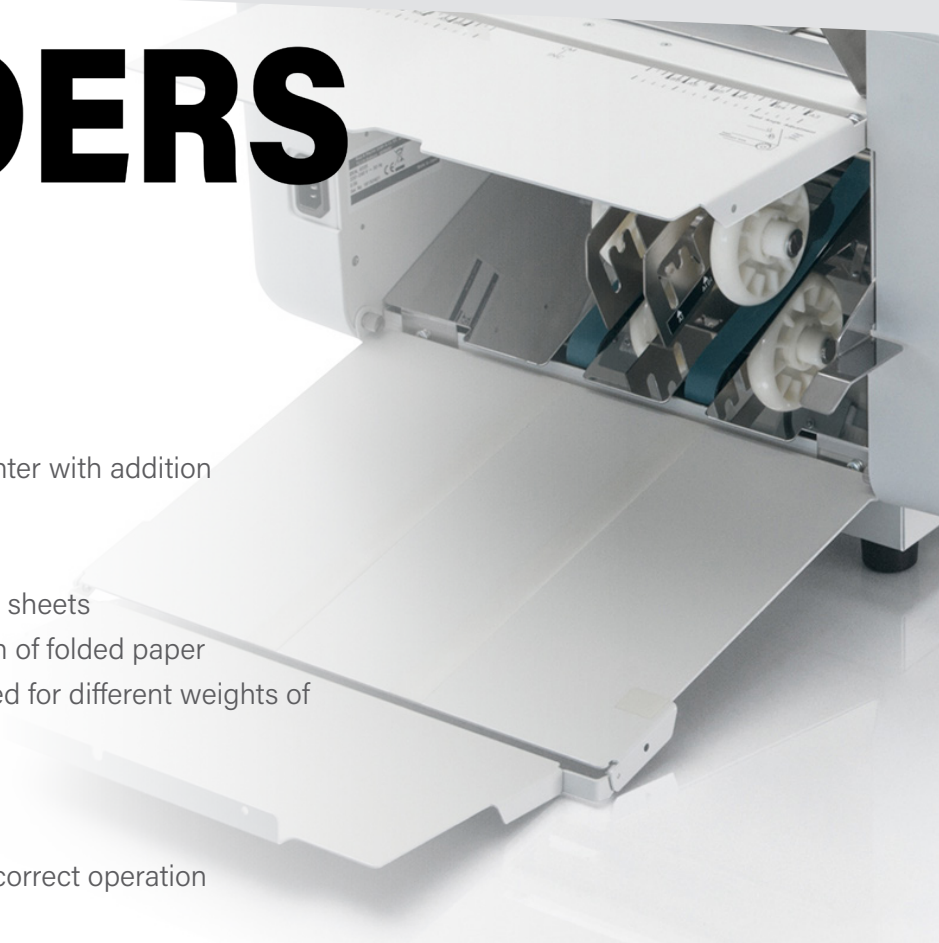


**Noise Reduction Mode**  
makes less folding noise


**Thick Paper Mode**  
gives bigger folding impact to papers




Single




Letter




Zigzag



Double parallel



Fold-out



Gate



Cross\*

\*Requires 2-passes

### Specifications:

|                         |                         |                         |                        |
|-------------------------|-------------------------|-------------------------|------------------------|
| Speed (sheets per hour) | Up to 14,000**          | Electrical requirements | 115 V, 60 Hz           |
| Paper size              | 3.5" x 5" to 11" x 17"  | Dimensions (D x W X H)  | 21.5" x 40.6" x 19.75" |
| Paper weight            | 12 to 80 lbs / 115 gsm* | Shipping weight         | 73 lbs                 |
| Sheet capacity          | 500*                    |                         |                        |

\* May vary due to variations in paper and power supply

\*\* Speed based on half-fold application and 20 lb bond paper stock

www.mbmcorp.com  
843-552-2700

