VRCUT Ready

TRIUMPH®

Olmedo Badía S.A. de C.V.
www.olmedobadia.com
info@olmedobadia.com
Tel. (55)5557-0397

5560 & 5560LT

Programmable cutter with hydraulic blade and clamp drive, power back gauge, digital touchpad, and IR safety light beams on front table. 5560 LT model equipped with front and rear air tables (available by special order only).

Register on Lytrod.com to receive your free VRCut Hardware Kit

A IR SAFETY CURTAIN
IR light beam safety curtain covers work area to ensure the highest level of operator safety.

B ELECTRONIC HAND WHEEL
The electronic hand wheel, with infinitely variable speed control, is used for manual back gauge positioning.

C EASY CUT BLADE ACTIVATION BARS
Patented EASY CUT blade activation bars ensure true, two-hand operation and allow blade and clamp to be activated independently.

D SWING CUT BLADE
The German high speed steel blade with swingcut movement provides the highest level of cutting accuracy.

E HARDWARE KIT
Register on Lytrod.com to receive your free VR-Cut Hardware Kit. Everything you need, right out of the box.

F HANDJUSTABLE HYDRAULIC CLAMP
Clamping pressure is fully adjustable between 1,900 and 3,800 psi.

www.mbmcorp.com
843-552-2700
MBM

VRCUT™ Ready TRIUMPH®

Olmedo Badía S.A. de C.V.
www.olmedobadia.com
info@olmedobadia.com
Tel. (55)5557-0397

5560 & 5560LT

- Programmable cutter with hydraulic blade and clamp drive, power back gauge, digital touchpad
- Electric back gauge drive with touchpad for easy programming
- Stores 99 programs with up to 99 steps in each
- Pre-programmed for standard paper sizes
- Memory key for repeat cuts
- Automatic set function for reference measurement and eject function for pushing out paper
- Self-diagnostic system with error indication on display
- Bright, LED optical cutting line
- Automatic blade return from every position
- Disc brake for instant blade stop

LYTROD™ SOFTWARE

VRCUT™

CUT WITH CONFIDENCE

The VRCut solution consists of two independent modules that work together. The Impose module creates PDF documents formatted specifically to work with the VRCUT controller module. The controller module connects directly to the Triumph cutter moving the back gauge and visually guiding operators through the cutting sequence.

Specifications:

Cutting width	21.6″
Cutting height	3.7″ (3.6″ w/ false clamp)
Narrow cut	1.2″ (2.3″ w/ false clamp)
Length behind blade	27.4″
Electrical requirements	115 V, 60 Hz 20 amp dedicated line
Dimensions (D x W X H)	55″ x 42″ x 54″
Width with side table (W)	64″

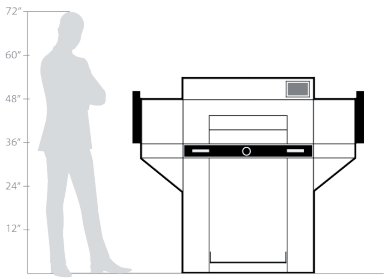

www.mbmcorp.com
843-552-2700
MBM

© 2026 MBM Corporation. All rights reserved. This information is subject to change without notice and products may be shown with optional features. 01/2026