


TRIUMPH®



Olmedo Badía S.A. de C.V.
www.olmedobadia.com
info@olmedobadia.com
Tel. (55)5557-0397

6655

Programmable cutter with automatic clamp, power back gauge, and digital touchpad. Cutting width is a full 25 1/2 inches.

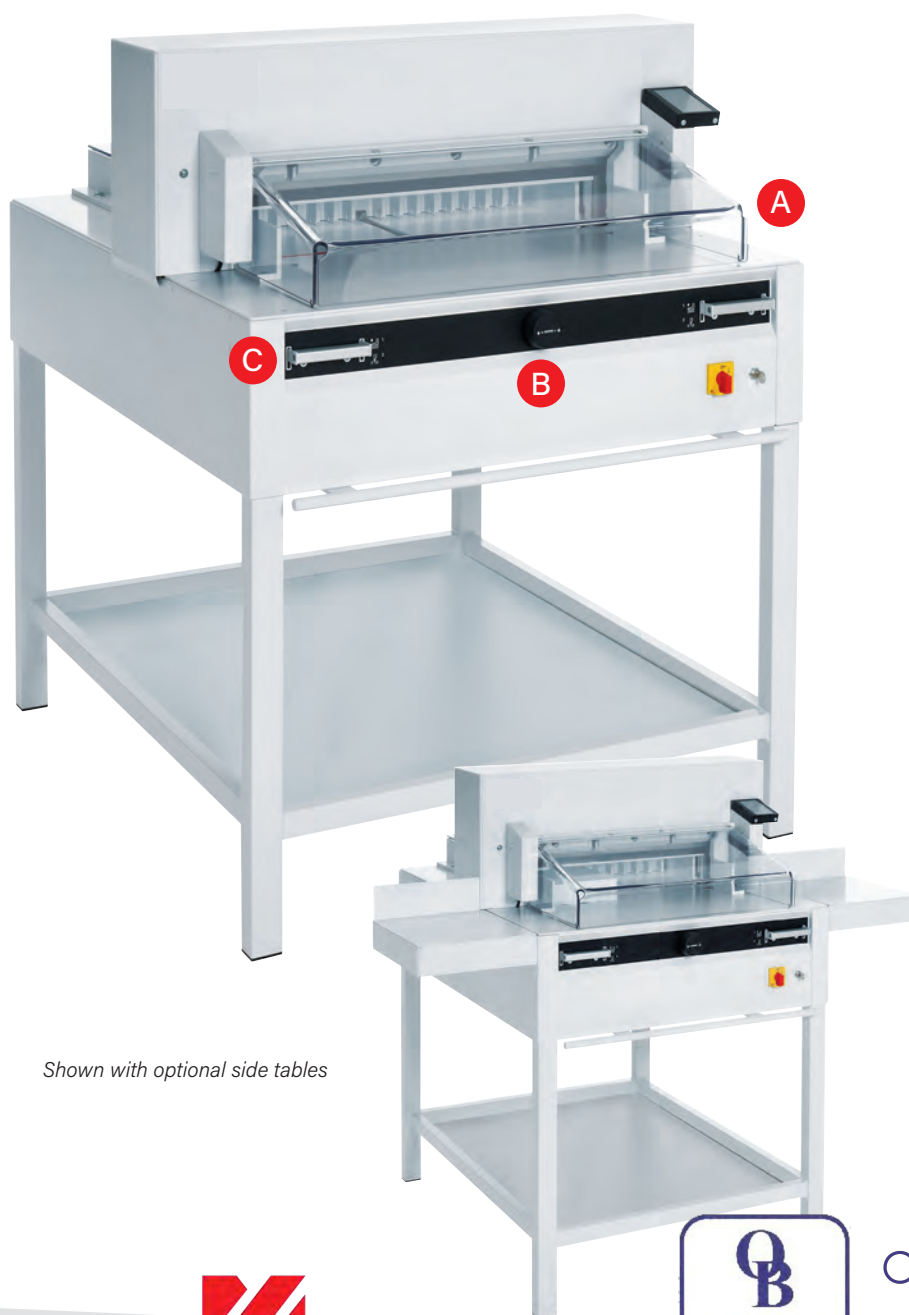

Shown with optional side tables



A TRANSPARENT SAFETY GUARD

A cut can only be executed if the hinged, electronically controlled safety guard is in the closed position.

B ELECTRONIC HAND WHEEL

The electronic hand wheel, with infinitely variable speed control, is used for manual back gauge positioning.

C EASY CUT BLADE ACTIVATION BARS

Patented EASY CUT blade activation bars ensure true, two-hand operation and allow blade and clamp to be activated independently.

D SAFE BLADE CHANGES

Blade changes can be made without removing the machine covers. The handy blade changing device covers the cutting edge of blade.

TRIUMPH®



Olmedo Badía S.A. de C.V.
www.olmedobadia.com
info@olmedobadia.com
Tel. (55)5557-0397

6655

- Digital measurement display with multilingual operator guidance, accurate to 1/10 mm or 1/100"
- Stores 99 programs with up to 99 steps in each
- Pre-programmed for standard paper sizes
- Memory key for repeat cuts
- Automatic set function for reference measurement and eject function for pushing out paper
- Self-diagnostic system with error indication on display
- Bright, LED optical cutting line
- Automatic blade return from every position
- Disc brake for instant blade stop
- Blade and cutting stick can be changed without removing covers



Digital Touchpad

The programmable control module is equipped with a multilingual touchpad for easy operation. 99 programs with 99 steps in each can be stored in memory.



Tool Holder

Convenient, drop-in tool holder is located on the rear of the machine and keeps all tools necessary for routine maintenance (including blade changes) within reach.

Specifications:

Cutting width	25 1/2"
Cutting height	3"
Narrow cut	1"
Dimensions (D x W x H)	48" x 39" x 51"
Width with side table (W)	61 1/2"



www.mbmcorp.com
843-552-2700

